


Product Datasheet

POLYPROPYLENE TERMINAL BLOCKS

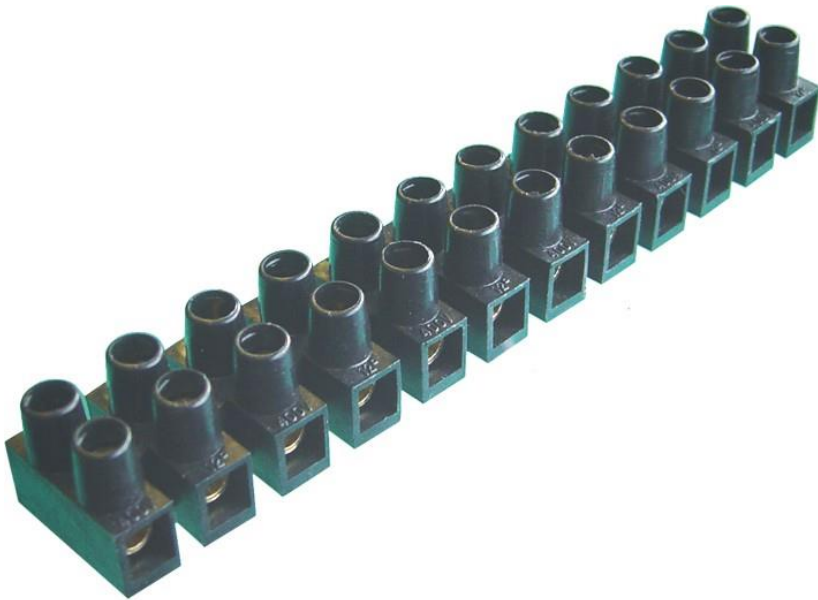

Specification

HOUSING: POLYPROPYLENE (PP)

INSERTS: BRASS

SCREWS: GALVANISED STEEL

TEMP.: 85°C

COLOR: WHITE OR BLACK


Standard: CE (BS EN 60998)

Feature:

SEMI-RIGID & LOW-COST

FLAME RETARDANT

**ALL SCREWS ARE CAPTIVE & RAISED
FOR EASY WIRING**

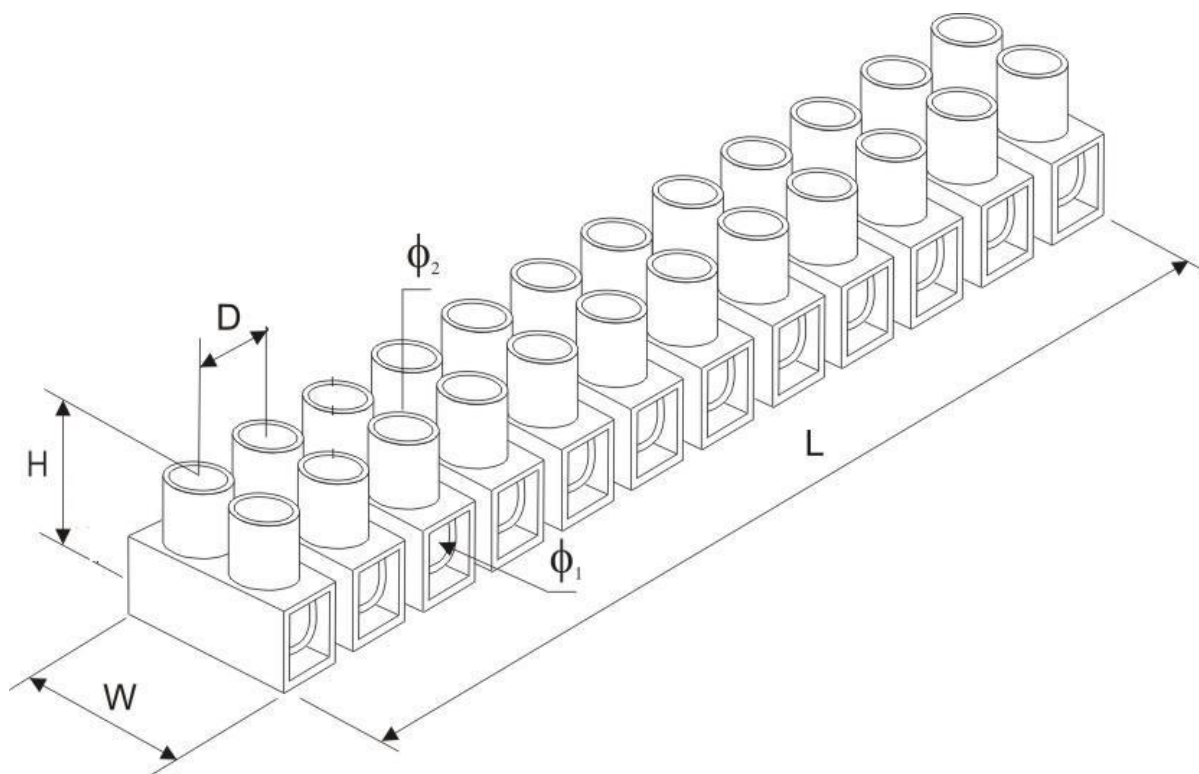

Dimensions

ART. NO.	SIZE	COLOUR	RATED VOLTAGE	RATED CURRENT	DIMENSIONS						
					L	W	Φ1	Φ2	D	H	d
7033814	2.5 MM ²	WHITE	400 V	3~24 A	93.7	16	2.8	2.1	8	15	8.1
7033833		BLACK			93.7						
7033818	4 MM ²	WHITE	400 V	5~32 A	116.5	20.5	3.3	3.1	10	17	10
7033836		BLACK			116.5						
7033827	6 MM ²	WHITE	400 V	10~57 A	139.5	23.5	4.5	3.6	12	20	12
7033830		BLACK			139.5						
7033849	10 MM ²	BLACK	400 V	10~57 A	130.5	20.7	4.3	2.8	11	16	11.4
7033820	16 MM ²	WHITE	400 V	30~76 A	175.5	25.3	5.5	4.1	15	23	15
7033842		BLACK			175.5						
7033824	25 MM ²	WHITE	500 V	40~101 A	228.5	35.2	7.1	4.1	19.5	34	19.5

CROSS SECTION: RATED FOR RIGID WIRES AND CABLES (IF FOR FLEXIBLE WIRES, IT SHOULD BE REDUCED ONE-SIZE, I.E. 6 MM² TO 4 MM² .

THE DATA OF "d" IS DISTANCE OF TWO FIXING HOLES.

Φ1 WIRE ENTRY HOLE DIAMETER

Φ2 FIXING HOLE DIAMETER