

Upper part, surge arrestor 320 V




V 20-C/...: SurgeController, upper part – Type 2 surge arrestor




- VDE-tested
- Plug-in upper part; upper part can be separated from base without tools
- Including thermal and dynamic separating device and visual fault display
- High current conductivity and long service life

Type	Highest continuous voltage V	U max DC	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
V20-C 0-320	320	420	1-pole	1	5,545	5099848

Dimensions

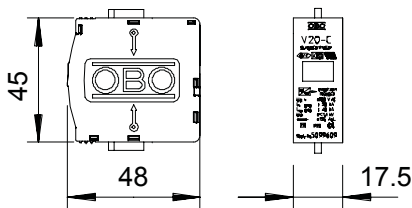

Connection options



V20-C 0-320

Max. continuous operating voltage V	U _c	320
U max DC V	U _c DC	420
		–
SPD to EN 61643-11		Type 2
SPD to IEC 61643-11		Class II
Lightning protection zone LPZ		1→2
Nominal discharge current (8/20) kA	I _n	20
Maximum discharge current (8/20 μs) kA	I _{max}	40
Voltage protection level kV	U _p	< 1,4
Response time ns	t _A	< 25
Maximum back-up fuse A		125
Temperature range °C	θ	-40-80
Protection rating		IP 20
Division unit TE (17.5 mm)		1